
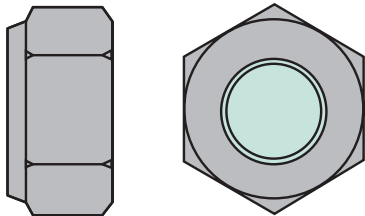


Norway Bolts

- Unique Design – Fangs bite into belt, locking bolt in place while nut is tightened.
- Eases fitting and removal of nut
- Large bolt head diameter = maximum resistance to pull through
- Flat bolt head – pulls fully flush into belt -reduces risk of rip out of bolt due to head protruding from back of belt
- Extensively tested and used in USA industry
- Suitable for recessed or non recessed bolt holes
- Ideal for CC-S Buckets

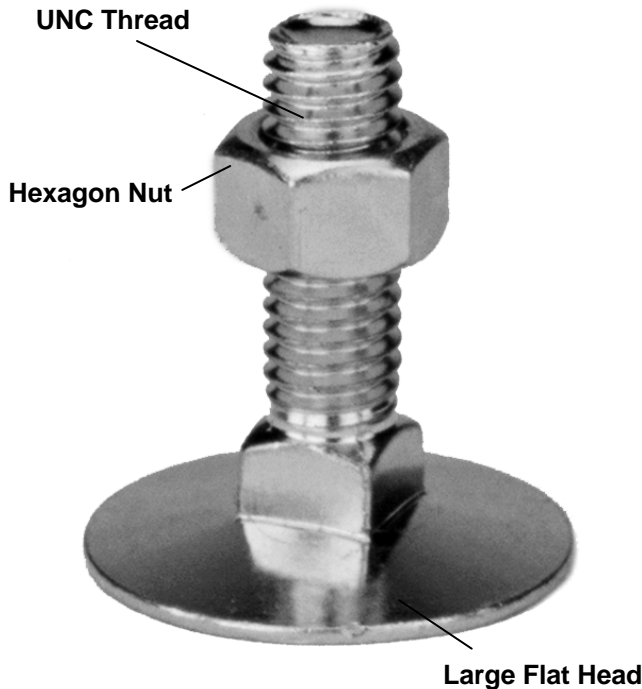

Option: Nylon insert self-locking nut for additional security (DIN 985)

**Free Design Service
& Technical Support
from our team of
specialist engineers**

Please refer to instruction manual for correct installation.
Information subject to change or correction. October 2007.



Technical Specifications

Size	Part Number		Head Diameter	No./Box	Wt./Box (lbs.)
	Zinc Plated Steel	Stainless Steel			
1/4" x 1"	NBQH4100Z	NBQH4100S4	1"	100	2.40
1/4" x 1-1/4"	NBQH4125Z	NBQH4125S4	1"	100	2.55
1/4" x 1-1/2"	NBQH4150Z	NBQH4150S4	1"	100	2.85
1/4" x 2"	NBQH4200Z	NBQH4200S4	1"	100	3.80
5/16" x 1"	NBQH6100Z	NBQH6100S4	1-3/16"	100	4.10
5/16" x 1-1/4"	NBQH6125Z	NBQH6125S4	1-3/16"	100	4.45
5/16" x 1-1/2"	NBQH6150Z	NBQH6150ZS4	1-3/16"	100	4.80
5/16" x 1-3/4"	NBQH6175Z	NBQH6175S4	1-3/16"	100	5.20
5/16" x 2"	NBQH6200Z	NBQH6200S4	1-3/16"	100	5.60
3/8" x 1"	NBQH8100Z	NBQH8100S4	1-1/4"	100	6.00
3/8" x 1-1/4"	NBQH8125Z	NBQH8125S4	1-1/4"	100	6.60
3/8" x 1-1/2"	NBQH8150Z	NBQH8150S4	1-1/4"	100	7.10
3/8" x 2"	NBQH8200Z	NBQH8200S4	1-1/4"	100	8.10

Please refer to instruction manual for correct installation. Information subject to change or correction. October 2007.